



E1552.01-113-11-R0 ACOUSTICAL PERFORMANCE TEST REPORT ASTM E 492

Rendered to

REGUPOL AMERICA

Series/Model: 3 mm Regupol Sonus Rubber Underlayment

Specimen Type: Floor/Ceiling Assembly

Overall Size: 3023 mm by 3632 mm

IIC 54

Test Specimen Identification:

Floor Topping: 11.92 mm Hardwood Flooring Floor Underlayment: 3 mm Regupol Sonus Rubber Underlayment Floor Slab: 203 mm Concrete slab

Reference should be made to Architectural Testing, Inc. Report E1552.01-113-11 for complete test specimen description.

130 Derry Court York, PA 17406 p. 717.764.7700 f. 717.764.4129





Acoustical Performance Test Report

REGUPOL AMERICA 33 Keystone Drive Lebanon, Pennsylvania 17042

Report	E1552.01-113-11
Test Date	10/30/14
Report Date	01/28/15
Record Retention End Date	10/30/18

Project Scope

Regupol America contracted Architectural Testing to conduct an impact sound transmission test. A summary of the results is listed in the Test Results section, and the complete test data is included as attachments to this report. The client provided the test specimen.

Test Methods

The acoustical tests were conducted in accordance with the following standards. The equipment listed in the attachments meets the requirements of the following standards.

ASTM E 492-09, Standard Test Method for Laboratory Measurement of Impact Sound Transmission Through Floor-Ceiling Assemblies Using the Tapping Machine ASTM E 989-06 (2012), Classification for Determination of Impact Insulation Class (IIC) ASTM E 2235-04 (2012) Standard Test Method for Determination of Decay Rates for Use in Sound Insulation Test Methods

Test Procedure

All testing was conducted in the VT test chambers at Architectural Testing, Inc. located in York, Pennsylvania. The microphones were calibrated before conducting the tests.

The impact sound transmission test was conducted in accordance with the ASTM E 492 test method. Two background noise sound pressure level, two sound pressure level measurements with the tapping machine operating at each position specified by ASTM E 492, and twenty sound absorption measurements were conducted at each of five microphone positions.

The air temperature and relative humidity conditions were monitored and recorded during all measurements.





Test Conditions

Receive Room			
Maximum Temperature	17.8 °C	Maximum Relative Humidity	57%
Minimum Temperature	17.3 °C	Minimum Relative Humidity	54%
Average Temperature	17.6 °C	Average Relative Humidity	55%

Test Calculations

The IIC (Impact Insulation Class) rating was calculated in accordance with ASTM E 989.

Material	Dimensions (mm)	Thickness (mm)	Manufacturer and Series	Quantity	Average Weight	
Handwood Electrica	914.4 by 139.7	11.9	N/A	10.98 m ²	7.62 kg/m ²	
Hardwood Flooring Note: Loose laid						
Rubber	3048 by 1219.2	3.0	Regupol Sonus	10.98 m ²	2.49 kg/m ²	
Underlayment	Note: Loose laid					
0	3023 by 3632	203.0	N/A	10.98 m ²	488.24 kg/m ²	
Concrete slab	Note: The concrete slab was installed in a test frame flush to the source room.					

Test Specimen Materials

Comments

The total weight of the floor/ceiling assembly was 5471.9 kg. Architectural Testing will store samples of the test specimen for four years. Photographs of the test specimen are included in the attachments. A drawing of the test specimen is included in the attachments.





Architectural Testing will service this report for the entire test record retention period. Test records, such as detailed drawings, datasheets, representative samples of test specimens, or other pertinent project documentation, will be retained by Architectural Testing for the entire test record retention period.

This report does not constitute certification of this product nor an opinion or endorsement by this laboratory. It is the exclusive property of the client so named herein and relates only to the specimen tested. This report may not be reproduced, except in full, without the written approval of Architectural Testing.

For ARCHITECTURAL TESTING, INC:

Leeland S. Hoover Technician II - Acoustical Testing Bradlay D. Hunt Project Manager - Acoustical Testing

Attachments (5)

* Stated by Client/Manufacturer N/A - Non Applicable





Revision Log

Revision	Date	Page(s)	Description
R0	01/28/15	N/A	Original Report Issue

This report produced from controlled document template ATI 00629(c), Revised 08/11/14.





Attachments

Instrumentation

Instrument	Manufacturer	Model	ATI Number	Date of Calibration
Data Acquisition Unit	National Instruments	PXI-1033	63763	06/14 *
Receive Room Microphone	PCB Piezotronics	378B20	64340	04/14
Receive Room Microphone	PCB Piezotronics	378B20	63744	04/14
Receive Room Microphone	PCB Piezotronics	378B20	63745	04/14
Receive Room Microphone	PCB Piezotronics	378B20	63746	04/14
Receive Room Microphone	PCB Piezotronics	378B20	63747	04/14
Receive Room Environmental Indicator	Comet	T7510	63810	09/14
Receive Room Environmental Indicator	Comet	T7510	63811	09/14
Microphone Calibrator	Norsonic	1251	Y002919	06/14
Tapping Machine	Norsonic	N-211	Y003242	03/14

* The calibration frequency for this equipment is every two years per the manufacturer's recommendation.

Test Chambers

VT Receive Room Volume 158.3 m ³	VT Receive Room Volume	158.3 m ³
---------------------------------------------	------------------------	----------------------





ACCREDITED

IMPACT SOUND TRANSMISSION

ASTM E 492

Test Date	10/30/14
Data File No.	E1552.01
Client	Regupol America
Description	11.92 mm Hardwood Flooring, 3 mm Regupol Sonus Rubber Underlayment, 203 mm Concrete slab
Specimen Area	10.98 m ²
Technician	Leeland S. Hoover

Freq	Background SPL	Absorption	Normalized Impact SPL	95% Confidence	Number of
(Hz)	(dB)	(m²)	(dB)	Limit	Deficiencies
80	58.1	15.5	60	3.8	-
100	42.4	11.5	52	1.6	0
125	36.2	9.7	58	6.3	0
160	35.0	9.2	57	2.1	0
200	27.5	11.7	58	4.0	0
250	30.2	10.7	64	4.0	6
315	27.2	9.6	63	3.6	5
400	28.0	8.2	65	1.3	8
500	26.0	7.5	59	5.2	3
630	25.1	7.1	54	6.8	0
800	25.9	7.2	51	7.0	0
1000	26.7	7.0	48	9.3	0
1250	26.0	7.0	44	9.0	0
1600	24.4	7.1	38	12.0	0
2000	15.7	7.9	34	10.9	0
2500	11.3	8.9	30	7.7	0
3150	9.8	9.9	28	9.8	0
4000	7.0	11.5	24	6.8	-
5000	6.9	13.6	17	4.3	-
6300	6.2	17.8	11	4.4	-
8000	6.5	23.4	10	3.0	-
10000	6.5	30.1	10	1.5	-

IIC Rating

(Impact Insulation Class)

Deficiencies 22 (Sum of Deficiencies)

54

Note: Receive Room levels less than 5 dB above the Background levels are highlighted in yellow.






E1552.01-113-11-R0



IMPACT SOUND TRANSMISSION

ASTM E 492

Test Date	10/30/14
Data File No.	E1552.01
Client	Regupol America
Description	11.92 mm Hardwood Flooring, 3 mm Regupol Sonus Rubber Underlayment, 203 mm Concrete slab
Specimen Area	10.98 m ²
Technician	Leeland S. Hoover

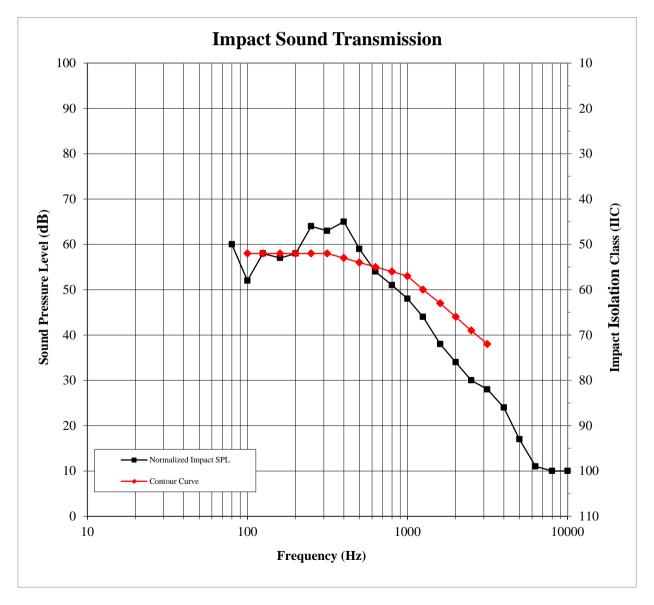





Photographs



Source Room View of Test Specimen Installation




Receive Room View of Test Specimen Installation





Drawing



1-Floor topping 2-Underlayment 3-Concrete Slab